


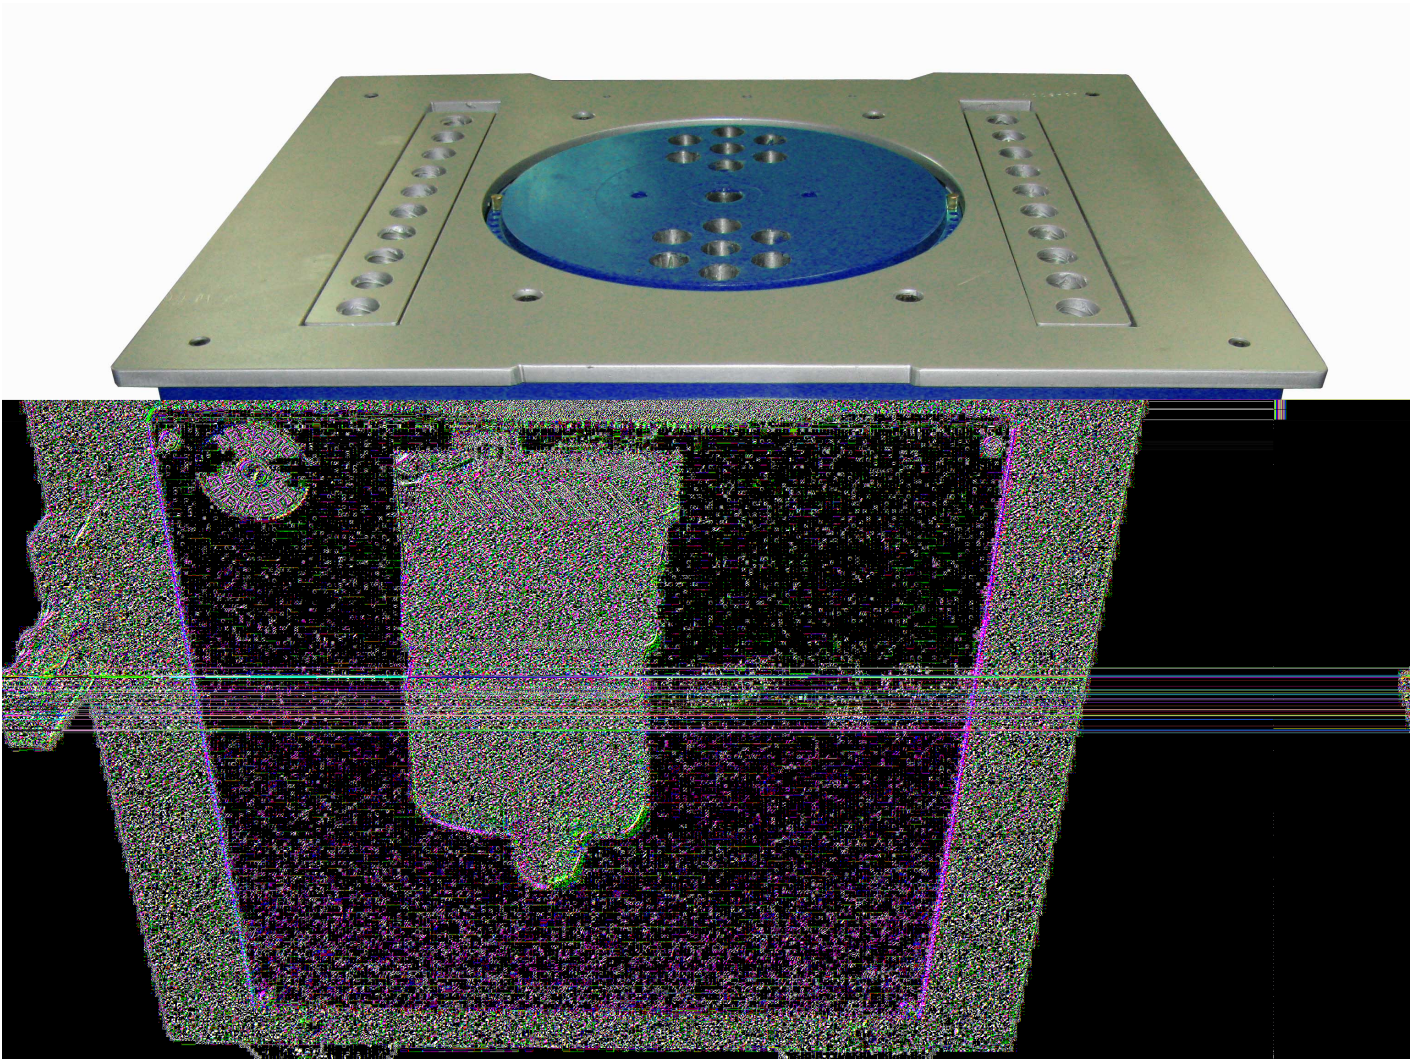

Cut- and bendmachine MSBC25-32E, 3x 400V-50Hz

510.10510

Features:

- Electrically driven bending machine for rebar.
- Simple and robust design with two adjustable guides.
- The bending plate can rotate both left and right.
- De cutting head is equipped with 2 hardenend steel blades that are changeable.
- Angle adjustment by means of stop pins (1 bending angle per direction of rotation).

Bending tools included:

- 6 bending rollers (Ø50-60-70-80-95mm)
- 3 bending pins
- 1 stirrup bending tool
- 1 small diameter bending pin
- 1 foot pedal

Technical information:

- RPM: 10
- Motor capacity: 2.2 KW at 3φ 400V/50Hz
- Max. bending capacity at R=650 N/mm²: 1×Ø28, 2×Ø20, 3×Ø16mm

- Max. bending capacity at $R=850 \text{ N/mm}^2$: $1 \times \varnothing 26$, $2 \times \varnothing 18$, $3 \times \varnothing 14 \text{ mm}$
- Max. cutting capacity at $R=650 \text{ N/mm}^2$: $1 \times \varnothing 24$, $2 \times \varnothing 18$, $3 \times \varnothing 14 \text{ mm}$
- Max. cutting capacity at $R=850 \text{ N/mm}^2$: $1 \times \varnothing 22$, $2 \times \varnothing 16$, $3 \times \varnothing 12 \text{ mm}$
- L×W×H: $80 \times 100 \times 83 \text{ cm}$
- Weight: 335 kg