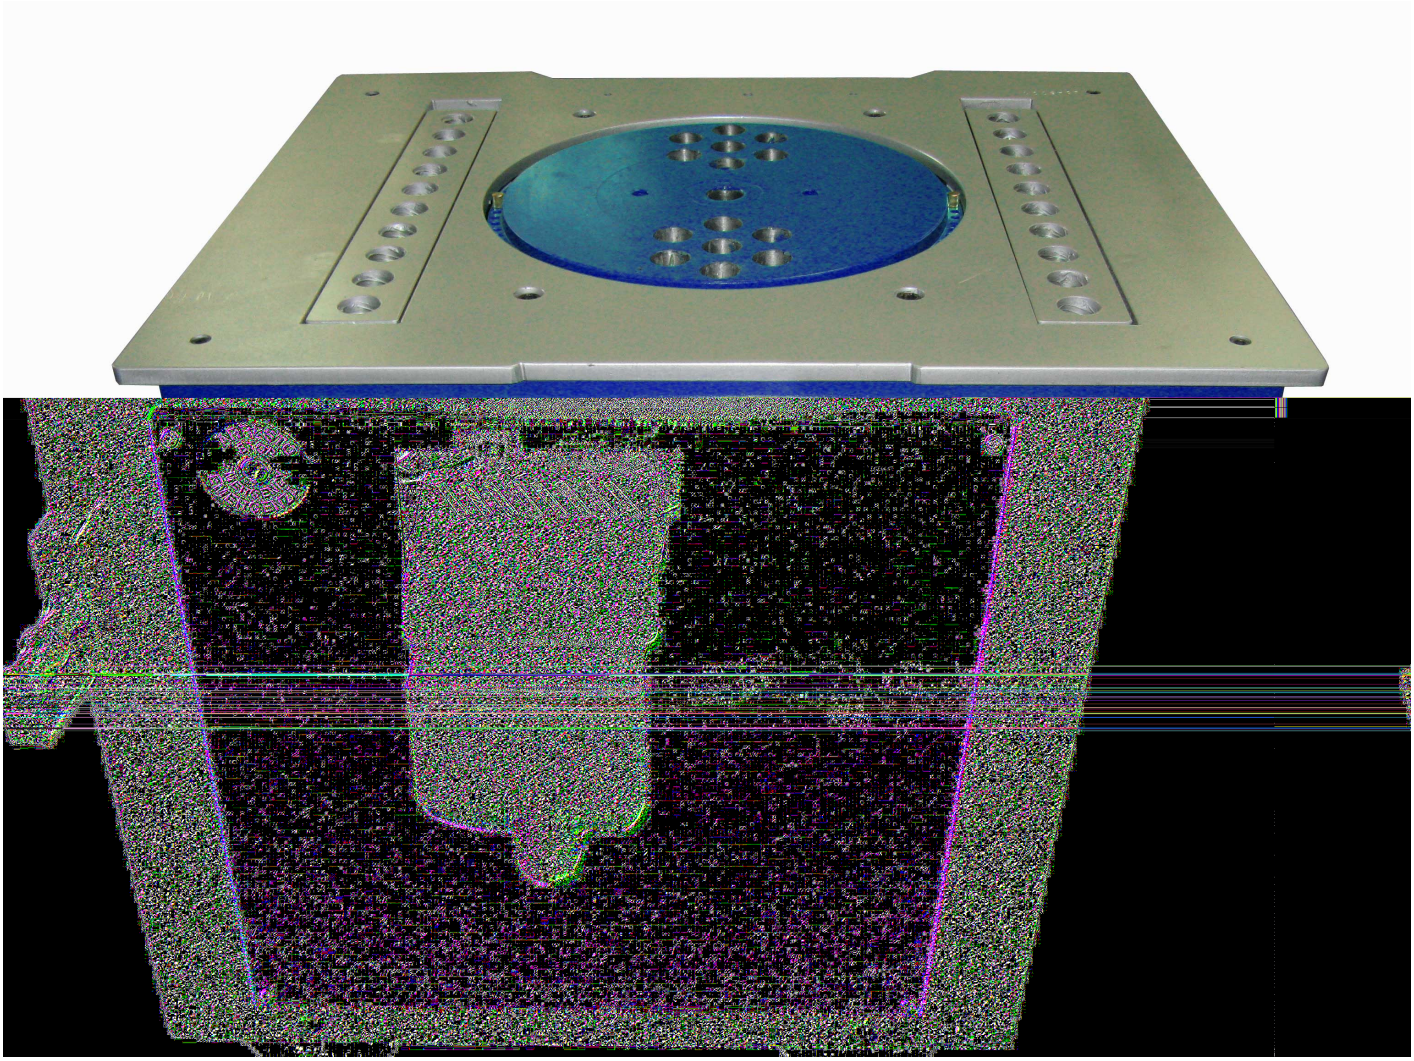

Cut- and bendmachine MSBC25-32E, 3x 400V-50Hz

510.10510

Features:
· Electrically driven bending machine for rebar.
· Simple and robust design with two adjustable guides.
· The bending plate can rotate both left and right.
· De cutting head is equipped with 2 hardenend steel blades that are changeable.
· Angle adjustment by means of stop pins (1 bending angle per direction of rotation).
Bending tools included:
· 6 bending rollers (Ø50-60-70-80-95mm)
· 3 bending pins
· 1 stirrup bending tool
· 1 small diameter bending pin
· 1 foot pedal
Technical information:
· RPM: 10
· Motor capacity: 2.2 KW at 3φ 400V/50Hz
· Max. bending capacity at R=650 N/mm²: 1×Ø28, 2×Ø20, 3×Ø16mm

· Max. bending capacity at R=850 N/mm²: 1×Ø26, 2×Ø18, 3×Ø14mm
· Max. cutting capacity at R=650 N/mm²: 1×Ø24, 2×Ø18, 3×Ø14mm
· Max. cutting capacity at R=850 N/mm²: 1×Ø22, 2×Ø16, 3×Ø12mm
· L×W×H: 80×100×83cm
· Weight: 335 kg